


MATAMP-2240


2-ZONE MATRIX MIXING AMPLIFIER

This matrix amplifier guarantees the ultimate in flexibility. You can direct the sound of connected music sources to up to two zones, with total control. In addition, there is a built-in DAB+/FM radio with BT. With its output of 240W per zone, it can handle any situation.

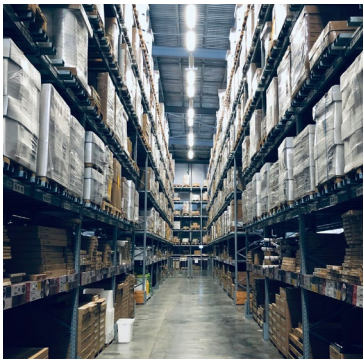

Different music in the warehouse and desks, with the MATAMP-2240 a small trick.

output power	2 x 240W
frequency range	60Hz-15kHz (+/-3dB)
zones	2 zones 100V & 8-16 ohms
input	70V / 100V / 4 - 16Ω
	MIC/Line 1-3 2.5mV, balanced combo XLR with selectable 48V phantom power supply
	Line 1 & EMC input 250 mV, RCA
	Mute (open = mute)
	2 x RJ45 ports (WP-2240 / MIC-2240)
output	line out RCA (0.775 OdBV)
built-in source	DAB+ / FM / Bluetooth / USB / micro SD
protection	Overvoltage, temperature, clipping, short-circuit protection
power supply	AC 230V, 50-60Hz
power consumption	600W (max)
dimensions (h x w x d)	88 x 484 x 405mm - 2U
weight	9,6kg
accessories	wall panel (Bluetooth) : WP-2240 selective broadcast microphone : MIC-2240



The optionally available MIC-2240 selective broadcast microphone and WP-2240 wall panel with BT complete the ease of use.

