


WMTV8050

UNIVERSAL FLACHBILDSCHIRM-WANDHALTERUNG

MONTAGE ANLEITUNG

- Suitable for screens up to 65" (165cm) / 70kg
- Mounts screen only 20mm from wall
- Suitable for concrete, brick or stud walls up to 32"
- Includes locking bar for secure installation
- Post-installation screen alignment
- Simple 'hook-on' installation with all mounting hardware included
- Max. Distance between fixings: **H.** 825mm x **V.** 500mm
- VESA® compatibility: 75 x 75, 100 x 100, 200 x 100, 200 x 200, 300 x 200, 300 x 300, 400 x 200, 400 x 300, 400 x 400, 600 x 400, 800 x 400 and 800 x 500mm

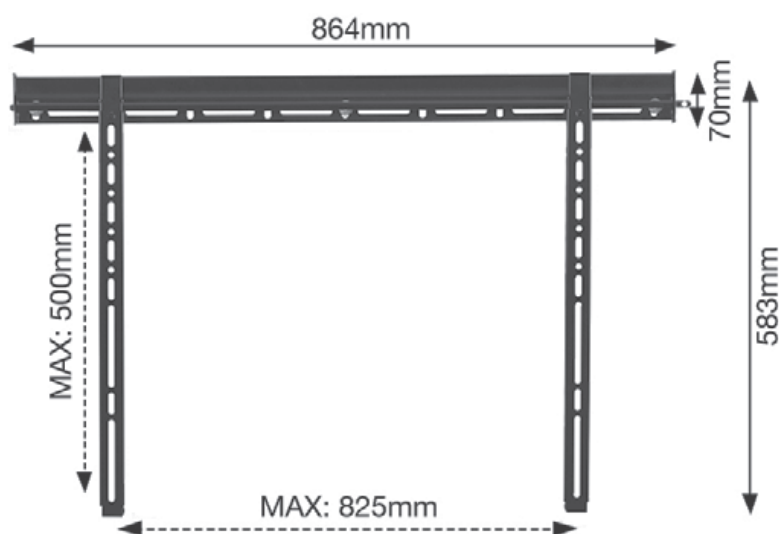

TOOLS REQUIRED

Crosshead
screwdriver



Drill



10mm (7/16") masonry bit
or 6mm (1/4") wood bit



Pencil



13mm (1/2") spanner
or socket



Level
(optional)



Stud finder
(optional)



65"

MAX

70kg

MAX

800
x
500


VESA



FIXING KIT

WMTV8050 **TEILELISTE**

BITTE FÜR ZUKÜNFTIGE HINWEISE AUFBEWAHREN

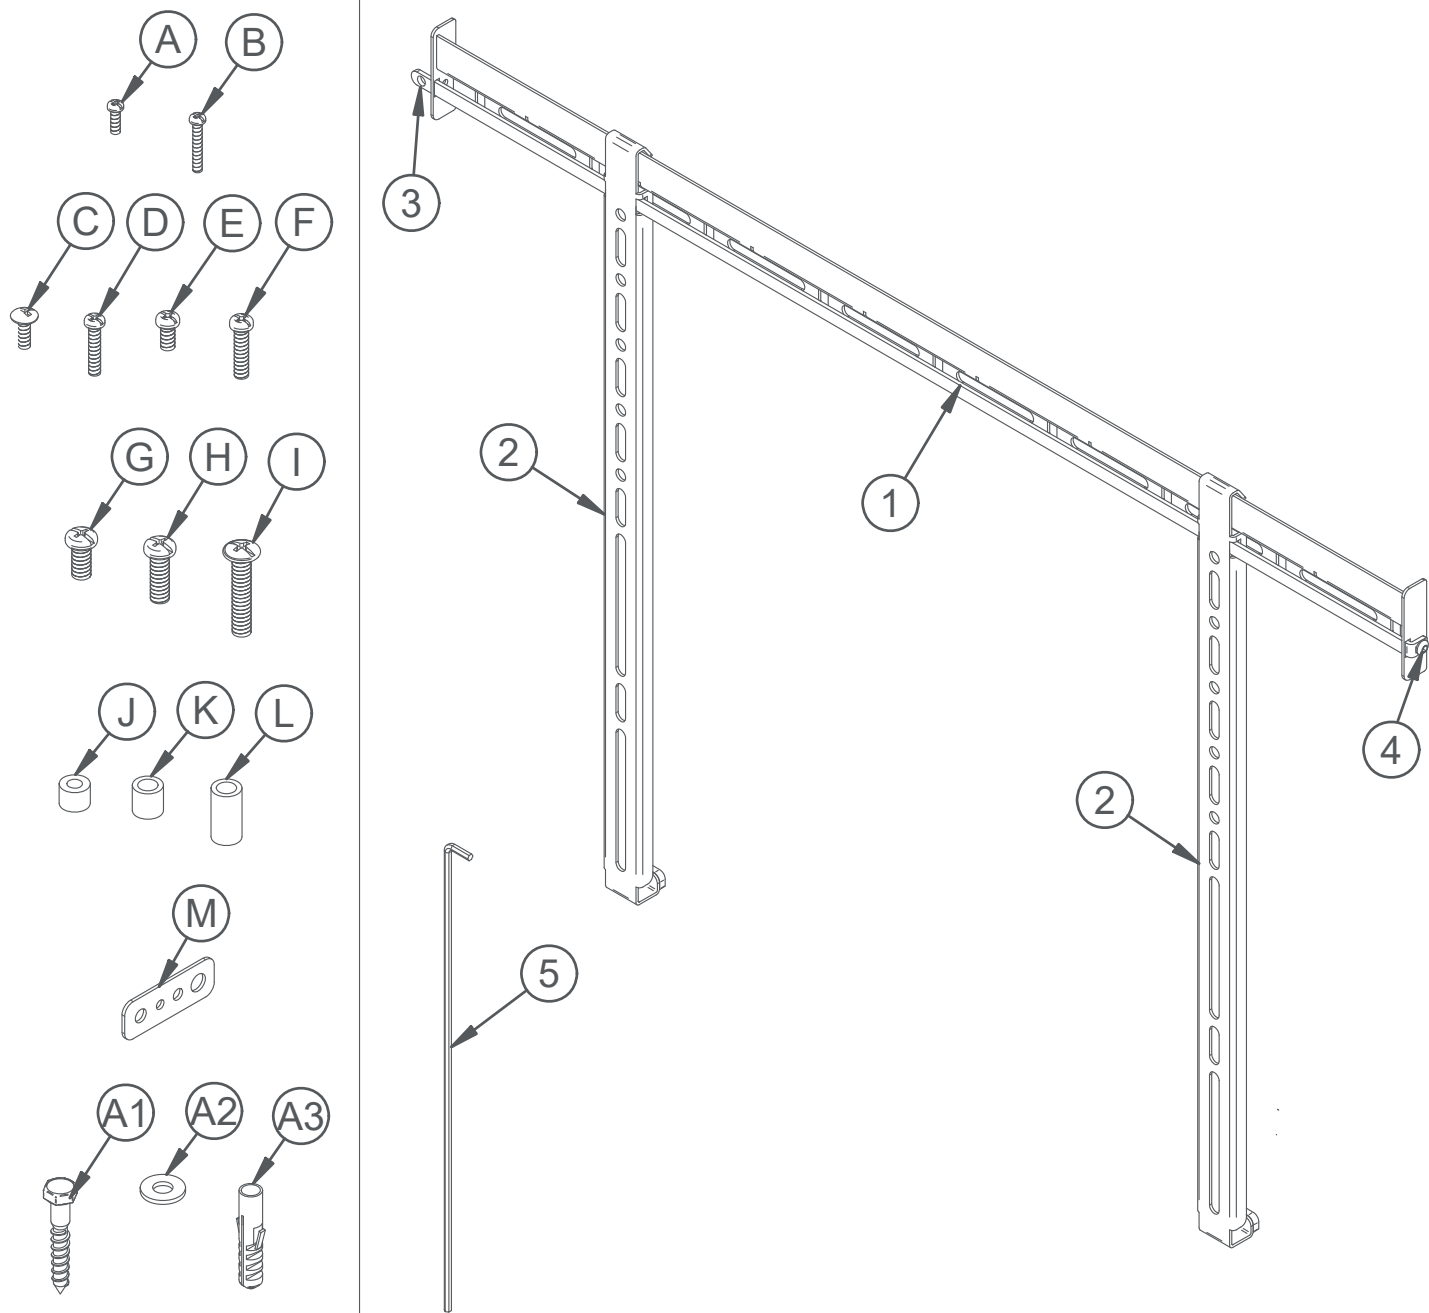

No.	PART NAME	QTY
1	WALL PLATE	1
2	INTERFACE ARM	2
3	LOCKING BAR	1
4	M6 SCREW	1
5	4mm HEX KEY	1
FIXING KIT		
A1	M8 X 50mm COACH SCREW	5
A2	M8 METAL WASHER	5
A3	NO.10 WALL PLUG	5


No.	INTERFACE KIT	QTY
A	M4 X 12mm SCREW	4
B	M4 X 25mm SCREW	4
C	M5 X 16mm SCREW	4
D	M5 X 25mm SCREW	4
E	M6 X 16mm SCREW	4
F	M6 X 25mm SCREW	4
G	M8 X 16mm SCREW	4
H	M8 X 25mm SCREW	4
I	M8 X 40mm SCREW	4
J	M6 X 12mm SPACER (FOR PARTS B, D & F)	4
K	M8 X 13mm SPACER (FOR PART H)	4
L	M8 X 24mm SPACER (FOR PART I)	4
M	MULTIWASHER (FOR PARTS A – I)	4

Suitable for loads up to 70Kg (154lbs)


MONTAGE ANLEITUNG

1. Attach wall plate to either a concrete or stud wall.


i. Concrete wall

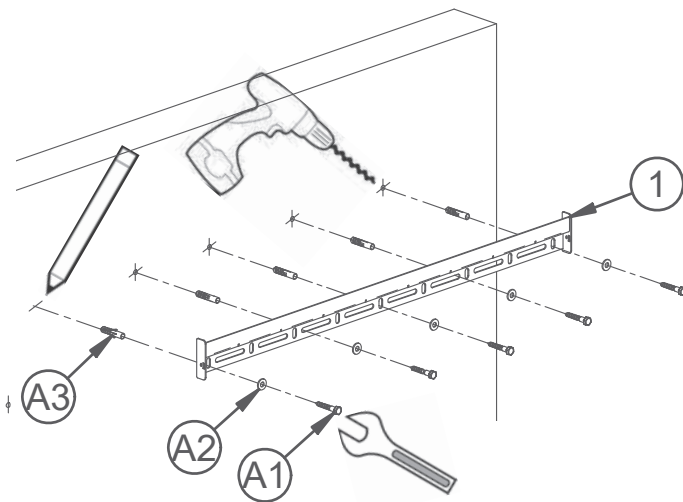

ii. Stud wall

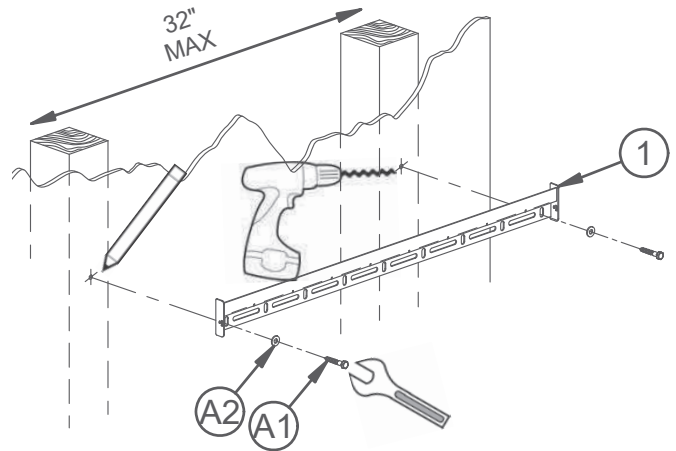


2. Attach interface arms.

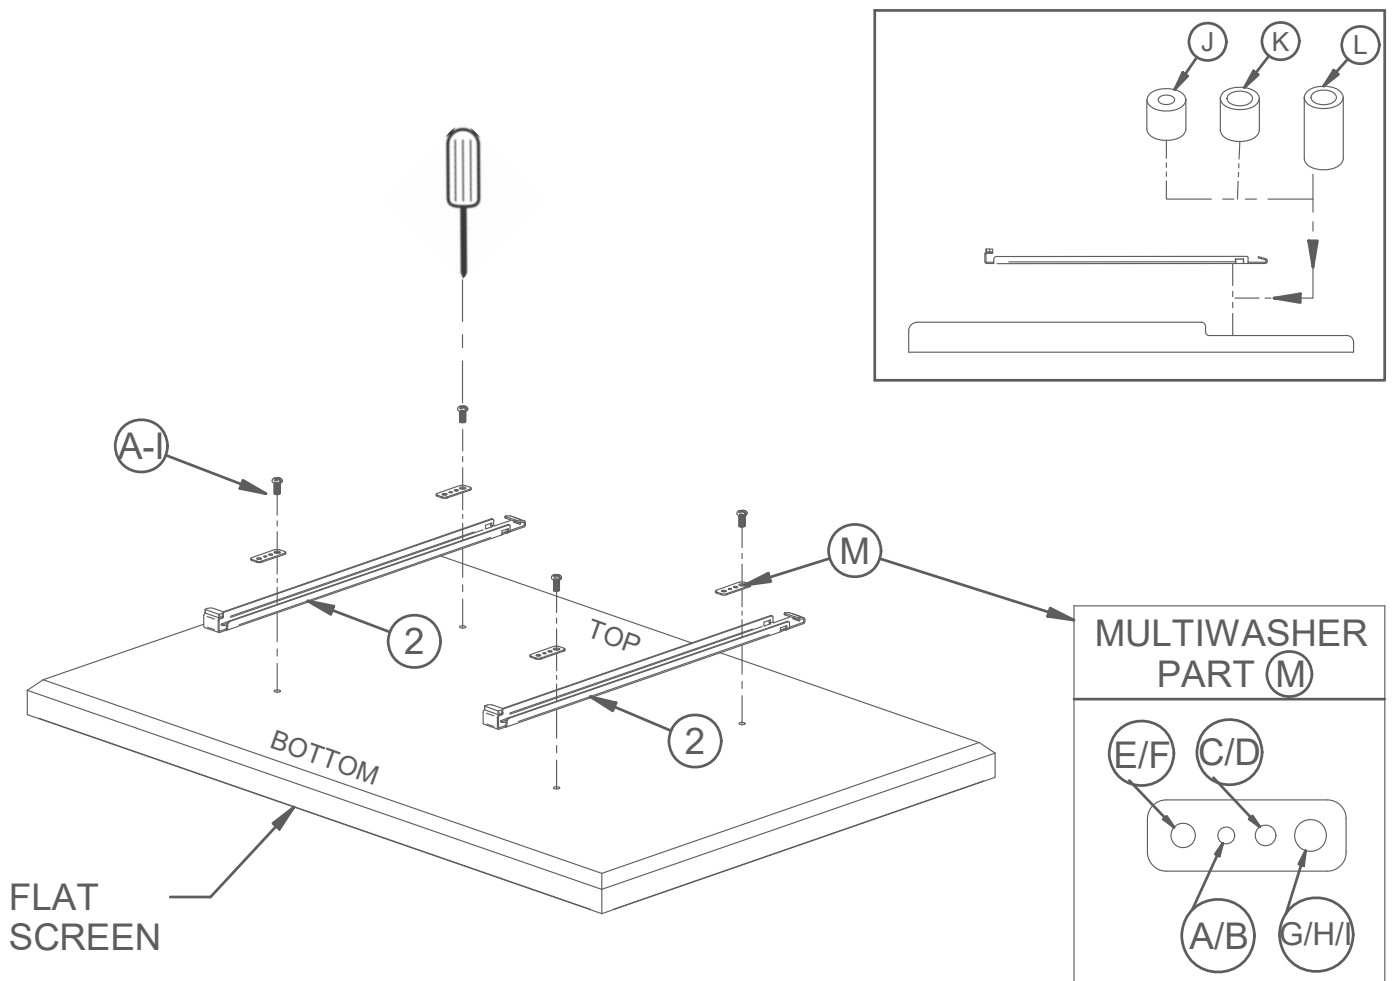


MONTAGE ANLEITUNG

3. Hook mount onto wall plate.

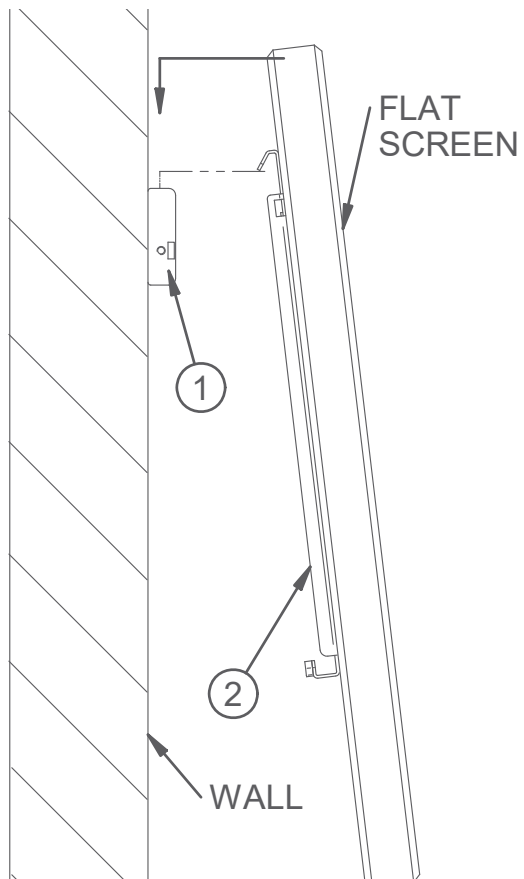

4. Lateral adjustment.

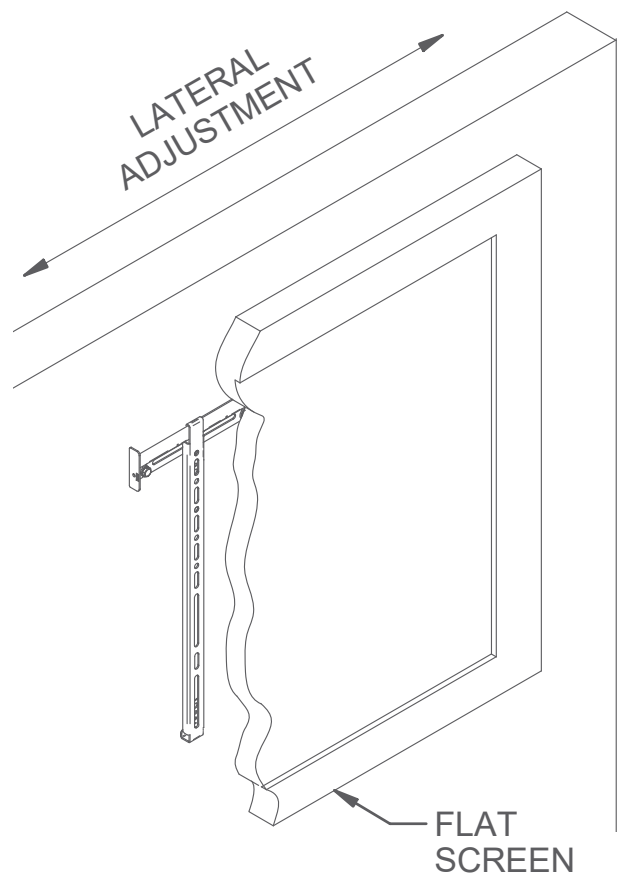

5. Insert locking bar.

