


# 100ICW5

## Product Data Sheet

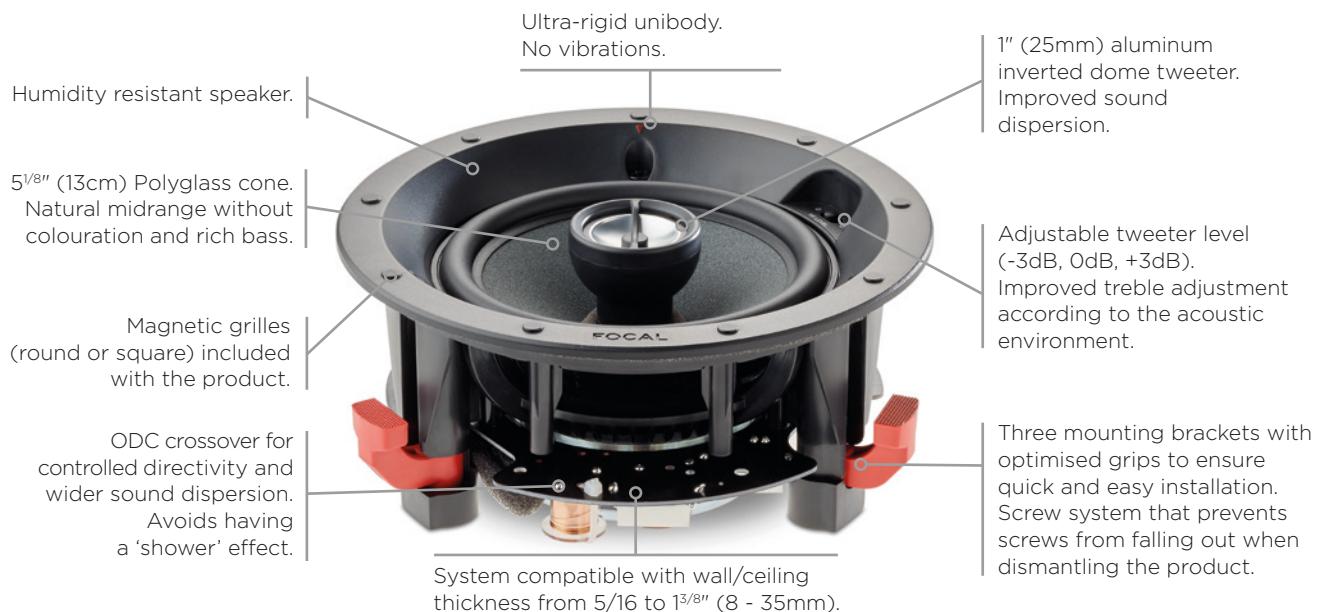

### Key Points

- Product designed and developed in France by Focal
- Compact product with shallow mounting depth
- For in-ceiling or in-wall loudspeakers (1 product, 2 uses)
- Possible to connect two loudspeakers to the same amplifier output
- Ready-to-paint grille

### Technical Specifications

Type	In-wall/In-ceiling - 2-way coaxial
Drivers	5" (13cm) Polyglass Midbass. 1" (25mm) Al inverted dome Tweeter
Sensitivity (2.83V/1m)	88dB
Frequency response (+/-3dB)	65Hz-23kHz
Low frequency point (-6dB)	56Hz
Nominal impedance	8Ω
Minimal impedance	7.3Ω
Recommended amplifier power	15-100W
External dimensions (Ø/Depth)	7 <sup>1/4</sup> "x3 <sup>27/64</sup> " (184x87mm)
Cut-Out diameter	6 <sup>19/64</sup> " (160mm)
Depth from wall	3 <sup>15/64</sup> " (82mm)
Net weight (with front grille)	3.19lbs (1.45kg)
Packing dimensions (WxDxH)	9 <sup>5/8</sup> "x9 <sup>5/8</sup> "x6 <sup>5/16</sup> " (245x245x161mm)
Total weight (with packaging)	4.52lbs (2.05kg)

