

Specifications

Audio in and out

- Up to 12 analogue inputs. User-adjustable sensitivity. Re-nameable legends.
- Up to 12 digital inputs. Re-nameable legends. 32 to 96kHz sampling, and up to 24-bit precision.
- Up to 8 digital outputs.
- Up to 8 analogue outputs.
- Up to 4 configurable 6-channel analogue inputs.

Control signals

- 3 trigger outputs, programmable by source.
- Meridian Comms and RS232 for control and setup.

Controls, etc.

Front-panel facia controls for:

- Source, DSP, Mute, Volume, and Off.


Hinged control panel provides additional switches for:

- Display, Copy, Store, parameter menus, Assign, Calibrate, and Configure.

Display

- 20-character dot-matrix display: adjustable brightness and contrast.
- Lights for Dolby, Digital, THX, DTS, and MPEG.

Front panel keys

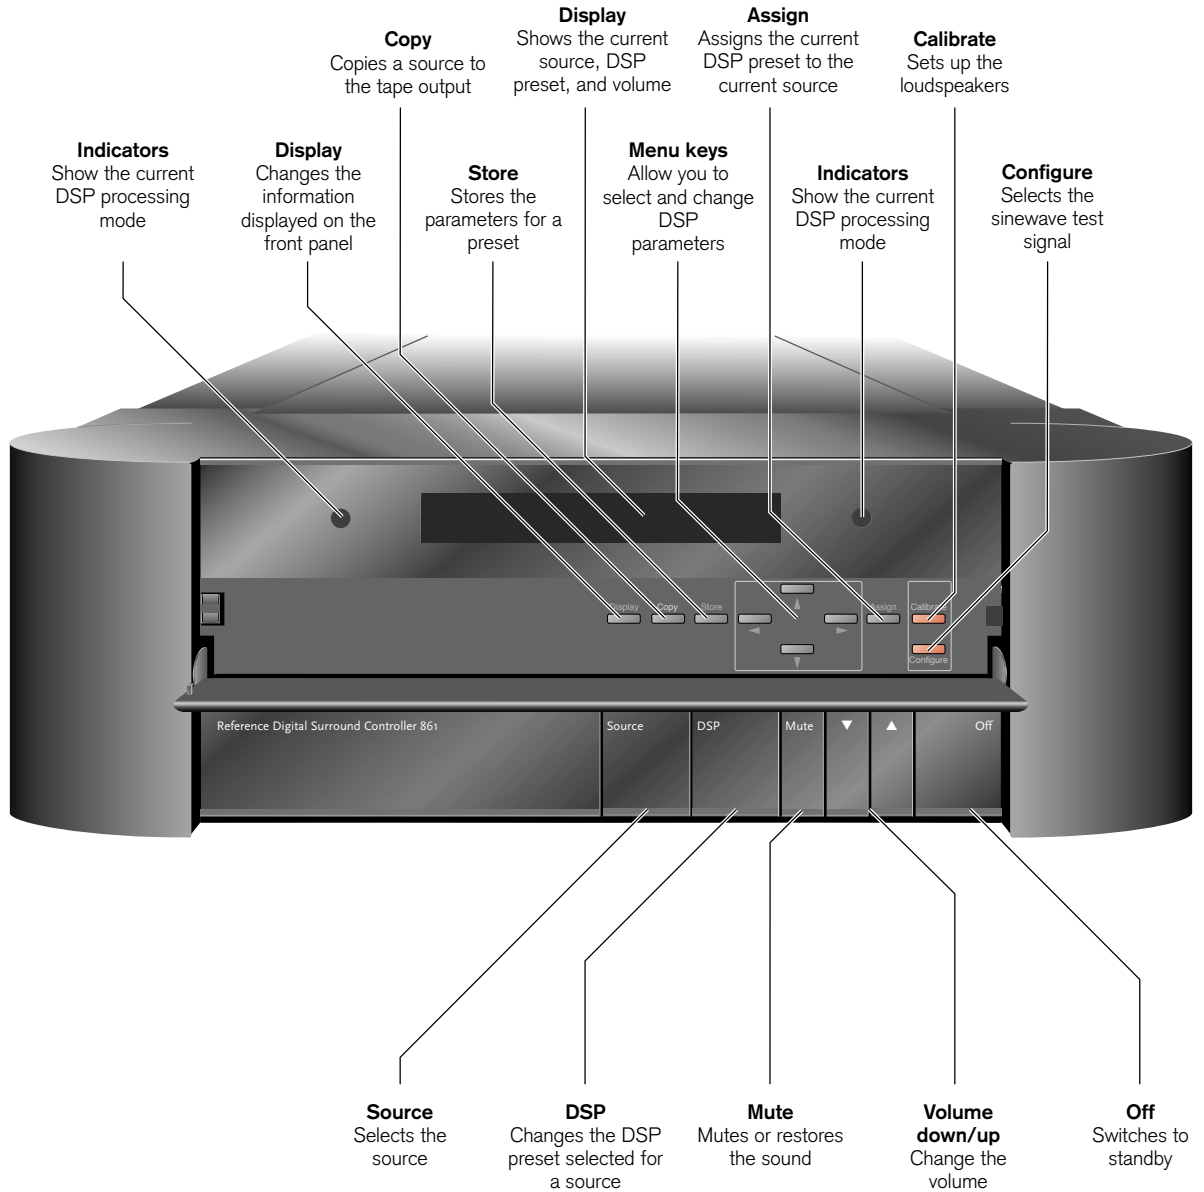

MSR+ keys

