


Silver Series 7G Limited Edition




Captivating in Black

Where elegance meets extraordinary sound. Silver 300 and 100 7G now available as a distinctive Limited Edition in Carbon Black Metallic.

A statement of style and sonic perfection.

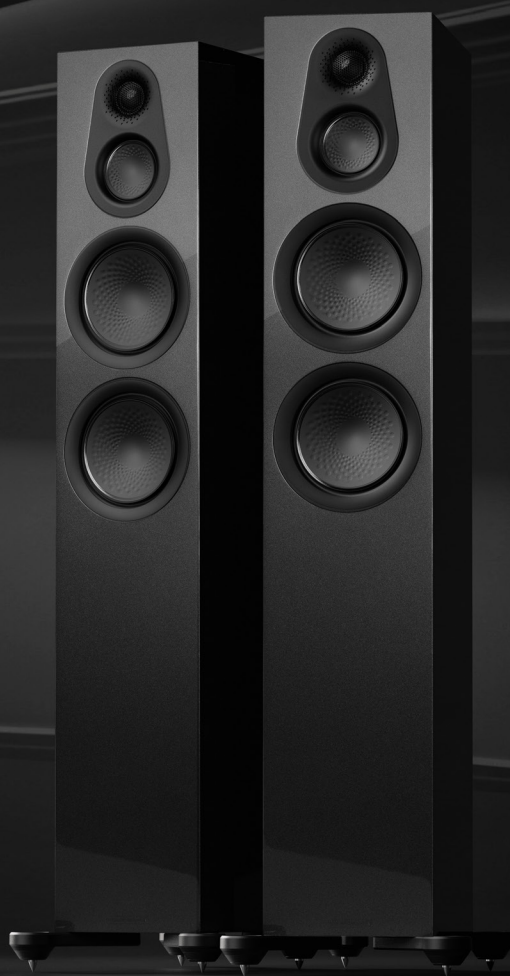

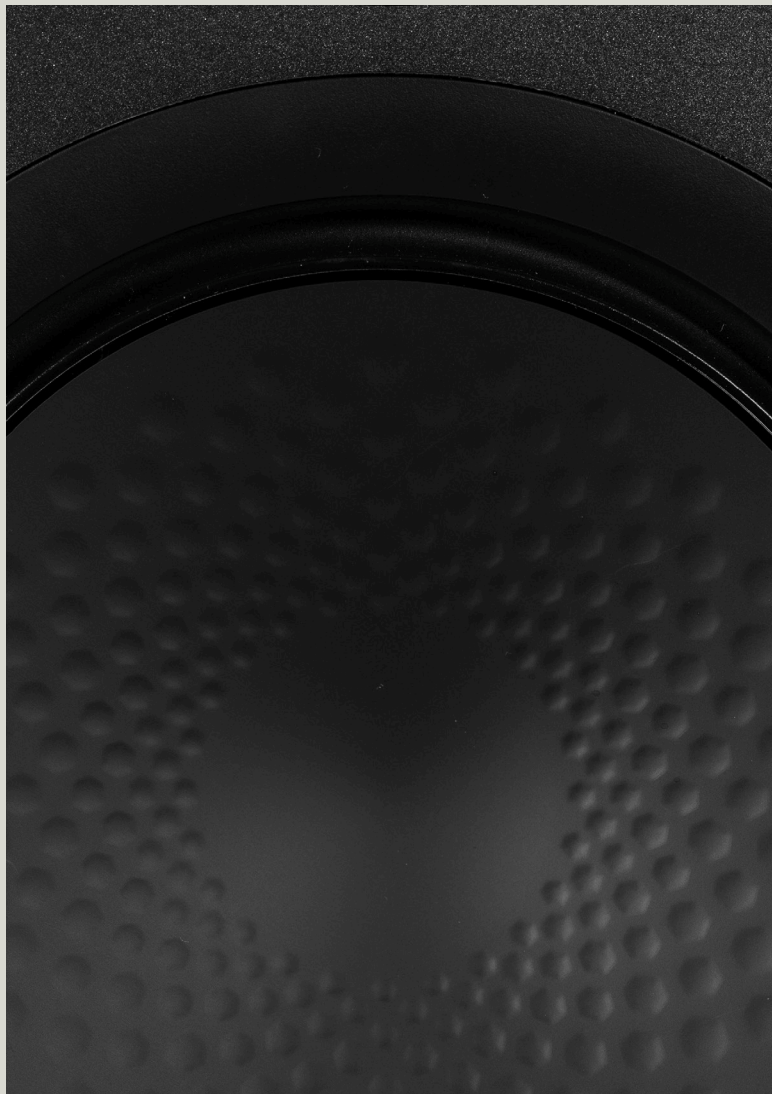

Silver Series 7G Limited Edition

A statement of style and sonic perfection, the Silver Series 300 & 100 7G Limited Edition speakers blend refined aesthetics with breathtaking audio performance. Finished in an exclusive Carbon Black Metallic, they exude sophistication while delivering the signature clarity, depth, and precision that define the Silver Series.

Crafted for true music lovers and audiophiles, these limited-edition speakers unveil every nuance with effortless detail - whether through the commanding presence of the Silver 300 7G floorstanders or the compact yet powerful Silver 100 7G standmount speakers.

Available in strictly limited numbers, these are not just speakers - they're collectibles for those who demand the extraordinary.



Silver 100 7G Limited Edition - Carbon Black Metallic



Silver 100 7G Limited Edition

System Format	2-Way	Crossover Frequency	2.3 kHz
Frequency Response (-6dB)	35 Hz - 35 kHz	Port Tuning Frequency	42Hz
Sensitivity (2.83v @ 1m)	87.5 dB	Drive Unit Complement	1 x 8" C-CAM RST II mid-bass driver 1 x 1" (25 mm) C-CAM Gold Dome tweeter with UD Waveguide II
Nominal Impedance	8 Ohms	External Dimensions including Grille and Terminals (H x W x D)	375 x 230 x 332 mm 14 ^{3/4} x 9 ^{1/8} x 13 ^{5/16} "
Minimum Impedance	4.9 Ohms @ 170 Hz	External Dimensions including Outrigger Feet and Spikes (H x W x D)	N/A
Maximum SPL	106 dBA (single)	Weight (Each)	9.4 kg (20 lb 12 oz)
Power Handling (RMS)	120 W	RRP (GBP, EUR, USD)	£925, €1,300 \$1,350
Recommended Amplifier Requirements	40 - 100 W	Crossover Frequency	2.3 kHz
Bass Alignment	Bass reflex HiVe II port system		



Silver 300 7G Limited Edition

System Format	3-Way	Crossover Frequency	750 Hz 2.8 kHz
Frequency Response (-6dB)	31 Hz - 35 kHz	Port Tuning Frequency	40Hz
Sensitivity (2.83v @ 1m)	87.5 dB	Drive Unit Complement	2 x 6" C-CAM RST II bass driver 1 x 3" C-CAM RST II mid-range driver 1 x 1" (25 mm) C-CAM Gold Dome tweeter with UD Waveguide II
Nominal Impedance	8 Ohms	External Dimensions including Grille and Terminals (H x W x D)	1000 x 185 x 332 mm 39 ^{3/8} x 7 ^{3/8} x 13 ^{5/16} "
Minimum Impedance	4.0 Ohms @ 160 Hz	External Dimensions including Outrigger Feet and Spikes (H x W x D)	1045 x 274 x 389 mm 419/64 x 1025/32 x 155/16"
Maximum SPL	110 dBA (single)	Weight (Each)	19.3 kg (42 lb 9 oz)
Power Handling (RMS)	200 W	RRP (GBP, EUR, USD)	£2,000, €2,500, \$2,750
Recommended Amplifier Requirements	80 - 200 W		
Bass Alignment	Bass reflex Dual HiVe II port system		
Crossover Frequency	L.F: 750 Hz M.F / H.F: 2.8 kHz		

Listen Again.



The Perfect Pairing
Anthra Subwoofers



Explore more
of Silver Series

