

## MAIN FEATURES

- FAMILY FEELING :**


The PC-562 directly refers to the Sonetto Collection for the choice of materials, the electroacoustic project and design. The satin aluminum trim that frame the tweeter recalls the aesthetic of the "Voice of Sonus faber".

- MAGNETIC GRILLES :**


The PC-562 is equipped with a magnetic edgeless round metal grille, ready to be painted. The square metal grille is optionally available.

- QUICK INSTALLATION :**

Thanks to the swing out dogs fixing system, all Palladio speakers can be secured quickly and effectively to plasterboard.



MAGNETIC ROUND METAL GRILLE



MAGNETIC SQUARE METAL GRILLE


**MID-WOOFER :**  
The custom diaphragm is made in natural fiber and cellulose pulp, according to the most natural sound.

**TWEETER :**  
DAD™ (Damped Apex Dome) silk dome tweeter.




**PARACROSS TOPOLOGY™**  
The anti-resonant design of the x-over network features the Paracross Topology™ circuitry, to guarantee a better definition and purity of sound.


<b>LOUDSPEAKER SYSTEM</b>	Two-way In-ceiling system. Infinite baffle
<b>TWEETER - DAD™ DRIVER</b>	29 mm / 1.1 in
<b>MIDWOOFER</b>	165 mm / 6.5 in
<b>CROSSOVER FREQUENCY - PARACROSS TOPOLOGY™</b>	3,000 Hz
<b>FREQUENCY RESPONSE</b>	50 – 25,000 Hz
<b>SENSITIVITY (2.83 Vrms @ 1m)</b>	90 dB <sub>SPL</sub>
<b>NOMINAL IMPEDANCE</b>	4 Ω
<b>COVERAGE ANGLE (1 kHz, @-6 dB)</b>	± 60° H - ± 60° V
<b>SUGGESTED AMPLIFIER POWER OUTPUT</b>	40 – 200W without clipping
<b>LONG-TERM MAX INPUT VOLTAGE (IEC 60268-5)</b>	20 Vrms
<b>FRAME OUTER</b>	Ø 234 mm / 9.2 in
<b>CUT OUT</b>	Ø 208 mm / 8.19 in
<b>DEPTH BEHIND SURFACE</b>	115 mm / 4.52 in
<b>PROTRUSION</b>	10 mm / 0.40 in
<b>NET WEIGHT</b>	3.1 Kg / 6.8 lb
<b>INCLUDED IN THE BOX</b>	Bezel-Free round magnetic grille
<b>ADDITIONAL FITTINGS</b>	Pre-mount kit
	Bezel-Free square magnetic grille

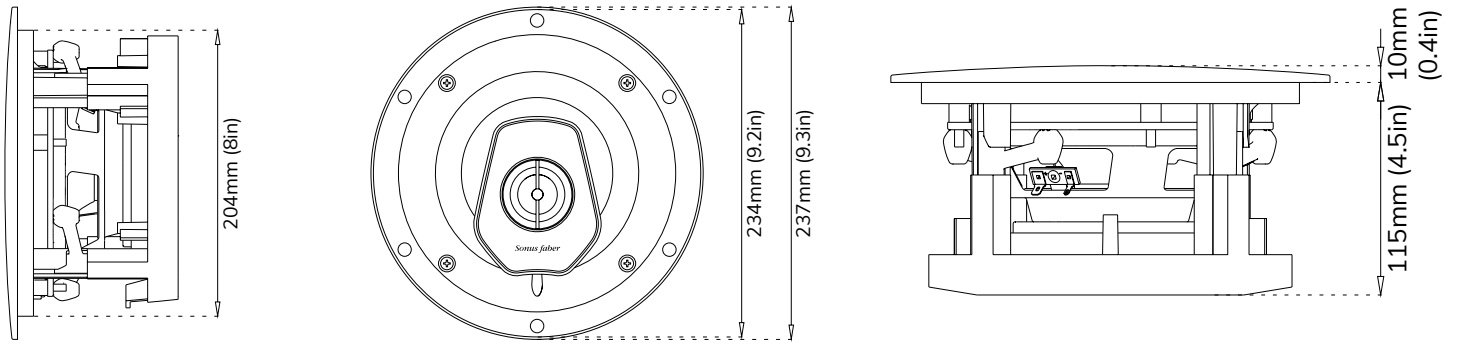

**THIRD OCTAVE AXIAL RESPONSE @1m**

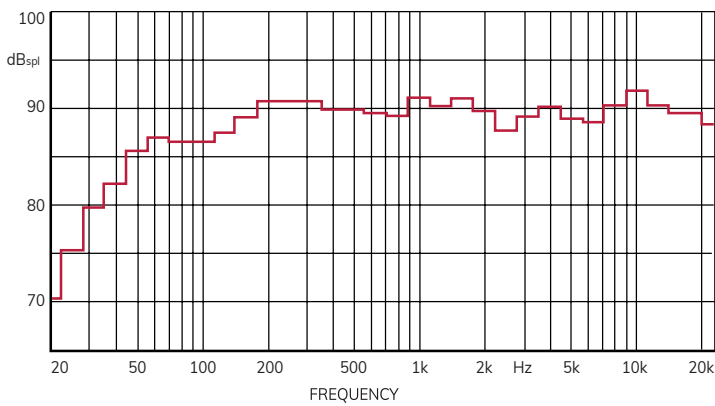

**IMPEDANCE [ MODULE AND PHASE ]**

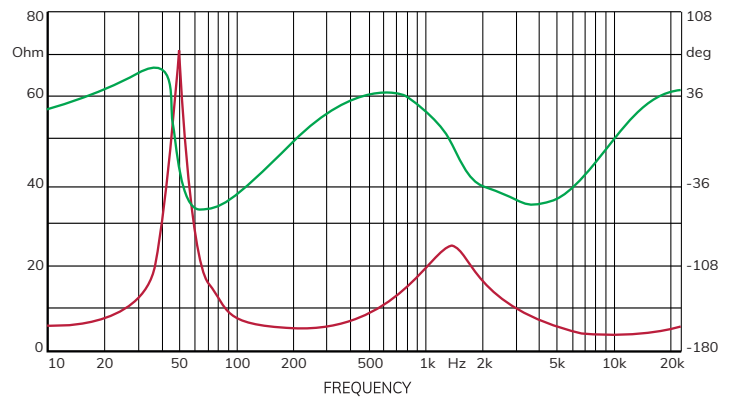

**AMPLIFIER OUTPUT POWER REQUIREMENTS VS. LISTENING DISTANCE (PER SINGLE CHANNEL) \***

	LISTENING DISTANCE [m]						
	1.50	1.75	2.00	2.50	3.00	3.50	4.00
<b>W CONTINUOUS (RMS)</b>	1.4	1.9	2.5	4	5.7	7.8	10
<b>W PEAK</b>	2.9	3.9	5.1	7.9	11.4	15.5	20

**\* [FOR A DIRECT SPL=85 dB; 1 kHz SINE TONE]**


	LISTENING DISTANCE [m]						
	1.50	1.75	2.00	2.50	3.00	3.50	4.00
<b>W CONTINUOUS (RMS)</b>	11.3	15.4	20.1	32	45	62	80
<b>W PEAK</b>	45	60	80	125	180	246	320

**\* [FOR A DIRECT SPL=85 dB; IEC TEST SIGNAL SIMULATING A NORMAL PROGRAM]**

The huge difference between the values depends on the signals that have been considered in the two examples. A simple sine tone is the most elementary one while the IEC signal is quite complex. In a real world, while the first could conveniently represent the power needs for speech, the second gives an idea of the power needs for wide frequency range, large headroom music.

**HORIZONTAL DISPERSION [ @1m WITH 2.83 VRMS ]**

--- 45° ; --- 30° ; --- 0°

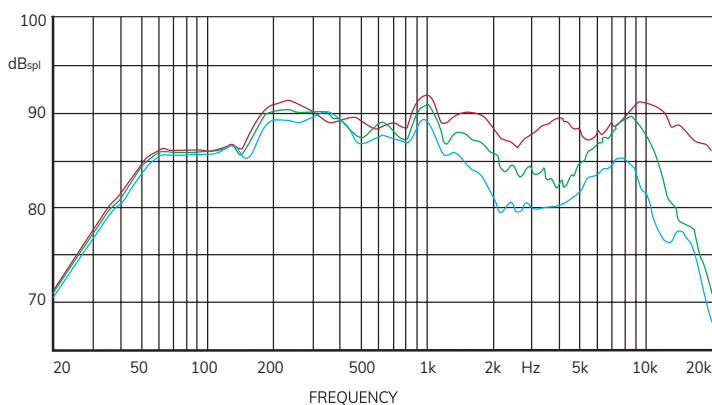

**VERTICAL DISPERSION [ @1m WITH 2.83 VRMS ]**

--- 45° ; --- 30° ; --- 0°

